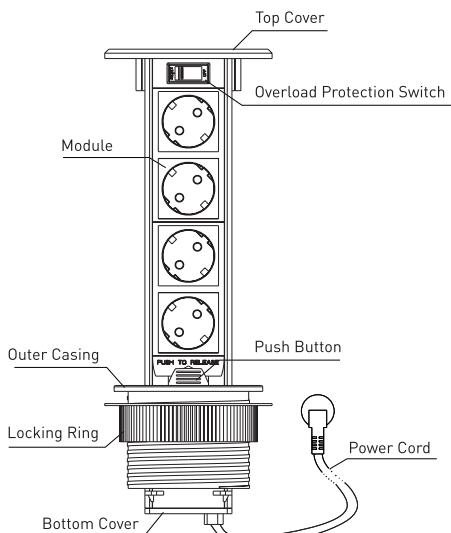
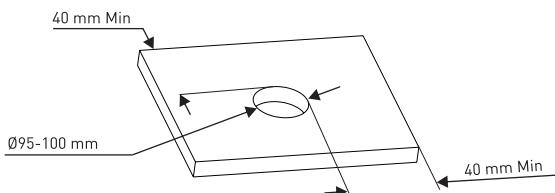


**PRODUCT DIAGRAM**

**INSTALLATION STEPS**


A detailed video instruction for assembling the product and installing modular sockets in a mini-column can be found on the product page on the website [ekfgroup.com](http://ekfgroup.com).

**1. Cut-out opening**


Make a circular grommet hole on the desired surface. Make sure to have enough space below for the unit to fully retract and for the cables to run unhindered from the base of the unit. For appropriate installation, please refer to the dimension table.


**2. Mounting the unit**


Remove the locking ring from the unit and keep it aside. Feed power cord through the grommet hole until the full length of the cable has passed through (Be careful to avoid damage to power cord). Mount the unit into the cut out and be sure it is fully levelled onto surface.

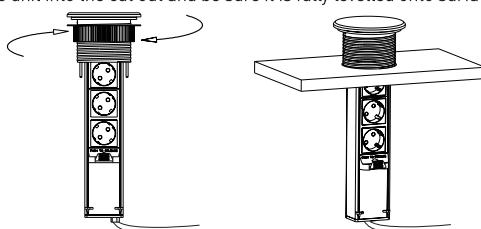
**3. Secure the product**

When in place to the preferred direction, secure the unit from under the desk by screwing back the locking ring in clockwise direction. (Please note that when the locking ring is skewed, it will get stuck. It needs to be unscrewed and re-tighten after alignment).

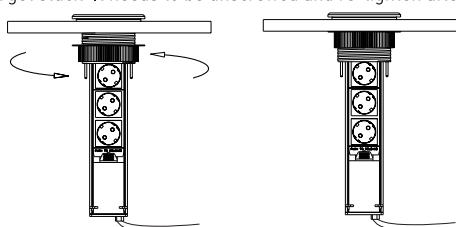
**4. Connect to power supply**

After the installation is complete, plug in the power cord into an applicable power outlet and the unit is ready to use.


**PRECAUTIONS**

1. For indoor use only
2. Avoid liquid spills into the outlet.
3. Ensure reliable grounding.
4. Only licensed professional electrical contractors should install the product.
5. If the product is malfunctioned, immediate electrical maintenance is required by professional.

**PRODUCT BRIEF INTRODUCTION**


1. Integrated and efficient vertical pop-up power outlet.
2. When in closed position, the cover panel features IP54 rating protective coverage rating.
3. Equipped with an overload protection switch for safe and smooth operation.
4. Type 45 modules sold separately. Combination of power, data and multimedia modules can be customized by user as needed.
5. Quick and simple installation.
6. Suitable for kitchen countertops, desktops and similar surfaces.

**TOOLS REQUIRED FOR INSTALLATION**


1. Hole opener (recommended cut-out dimension Ø95-100 mm).
2. Phillips head screwdriver.

**OPERATION INSTRUCTIONS**
**1. Opening the Pop-up unit**


Press firmly on the center of the top cover to release the locking mechanism. The unit will pop up at approximately 25mm from the surface. Then pull the cover upward until the unit locks into place.

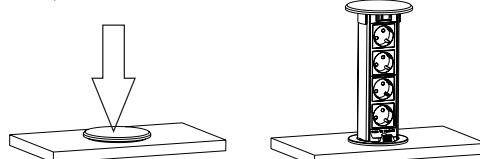
**2. Power On/Off control**

The plugged-in devices can be controlled using the overload protection switch. The switch will illuminate when toggled to power on (RESET) mode.

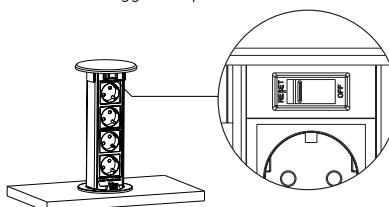

**3. Closing the Pop up unit**

To close the unit, push the red button to release the locking mechanism. The unit will lower and stop movement at approximately 25mm from the surface. Then push down on the center of the cover with your palm until the unit is secured in closed position.

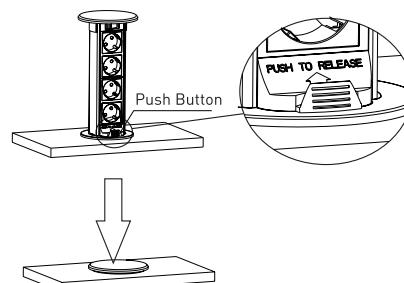
**DIMENSION TABLE**

Cut opening size	Ø 95-100 mm
Minimum distance from hole to the edge of installation surface	40 mm
Recommended space underneath the countertop	400 mm or more
Required distance between the mounting hole and power supply source	Within 1,5 m
Suggested surface thickness range	10-45 mm



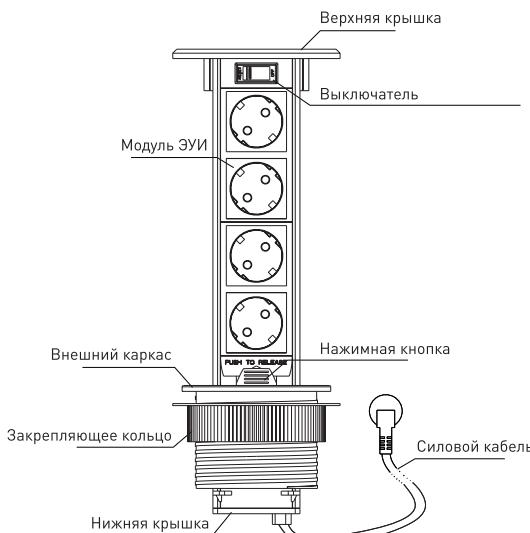


## ИНСТРУКЦИЯ ПО МОНТАЖУ

Подробную видео-инструкцию по сборке изделия и установке модульных ЭУИ в мини-колонну можно найти на странице продукта на сайте [ekfgroup.com](http://ekfgroup.com).


### 1. Вырезка отверстия

Сделайте круглое отверстие на выбранной поверхности. Убедитесь в наличии достаточно пространства под поверхностью стола для полного погружения изделия и беспрепятственной прокладки кабеля из основания изделия. Пожалуйста, используйте таблицу размеров для корректного монтажа.

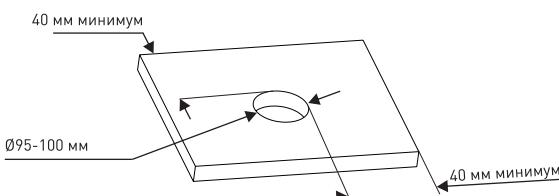


### 2. Установка изделия

Снимите закрепляющее кольцо с изделия и уберите в сторону. Протяните силовой кабель через отверстие на всю длину [Будьте осторожны, чтобы не допустить повреждения силового кабеля]. Установите изделие в отверстие и убедитесь, что оно полностью легло на поверхность.

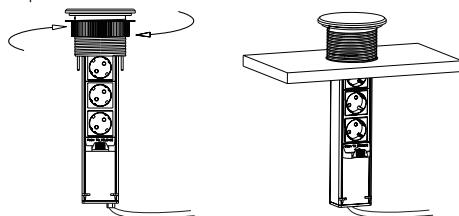


### 3. Закрепление изделия

Расположите изделие в нужном направлении и зафиксируйте его с нижней стороны стола, закрутив закрепляющее кольцо назад по направлению часовой стрелки. [Обратите внимание: если закрепляющее кольцо перекошено, оно может застрять. Необходимо извлечь кольцо и затем снова закрутить его после выравнивания].

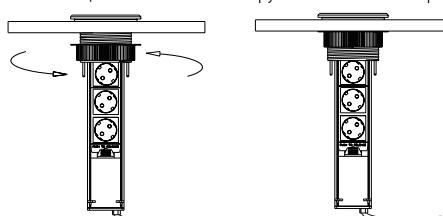

### 4. Подключение к источнику питания

После завершения монтажа подключите силовой кабель к доступной розетке, и изделие готово к работе.



## МЕРЫ ПРЕДОСТОРОЖНОСТИ

1. Только для использования в помещении.
2. Избегайте попадания жидкости в розетки.
3. Обеспечьте надежное заземление.
4. Сборка и установка производится профессиональным монтажником.
5. Если изделие неисправно, требуется немедленное профессиональное техническое обслуживание.

## КРАТКОЕ ОПИСАНИЕ ИЗДЕЛИЯ

1. Встроенный и эффективный вертикальный выдвижной розеточный блок.
2. В закрытом положении защитная панель обеспечивает уровень защиты IP54.
3. Укомплектован выключателем для безопасной и удобной эксплуатации.
4. Электроустановочные изделия стандарта 45x45 приобретаются отдельно. Возможность самостоятельного подбора индивидуальной комбинации силовых, информационных и мультимедийных розеток.
5. Быстрый и простой монтаж.
6. Подходит для кухонных столешниц, рабочих столов и других аналогичных поверхностей.


## ИНСТРУМЕНТЫ ДЛЯ МОНТАЖА

1. Кольцевая пила [рекомендуемый диаметр выреза 95-100 мм].
2. Крестовая отвертка.

## ИНСТРУКЦИЯ ПО ЭКСПЛУАТАЦИИ


### 1. Открытие мини-колонны

Нажмите на центр верхней крышки, чтобы разблокировать запирающий механизм. Устройство выдвинется наверх примерно на 25 мм от поверхности. Потяните крышку наверх, пока изделие не встанет на место.

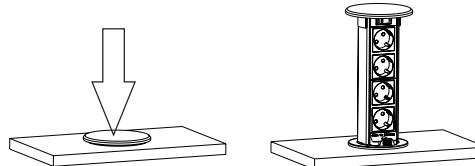


### 2. Включение/выключение

Включение/выключение подключенных устройств производится при помощи выключателя. При включении загорается индикатор.

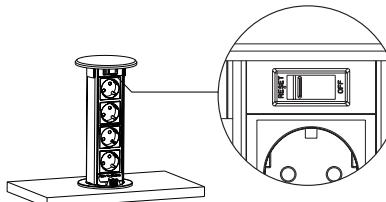

### 3. Закрытие мини-колонны

Чтобы закрыть розеточный блок, нажмите красную кнопку для разблокировки фиксирующего механизма. Изделие начнет опускаться вниз и остановится на расстоянии примерно 25 мм от поверхности. Затем надавите на центр верхней крышки, пока изделие не закроется.

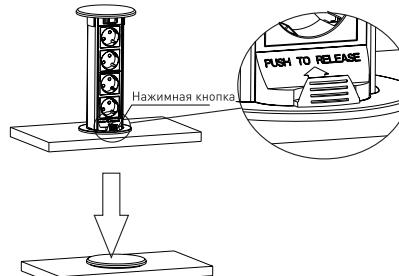

## ТАБЛИЦА РАЗМЕРОВ

Диаметр монтажного отверстия	Ø 95-100 мм
Минимальное расстояние от отверстия до края стола	40 мм
Рекомендуемое пространство под столом	400 мм и более
Расстояние от монтажного отверстия до источника питания	Не более 1,5 м
Допустимая толщина поверхности стола	10-45 мм

